




Description	Min	Typ	Max	Unit
Frequency Range	0.5		125	MHz
Overall Stability (+/-)	10		100	ppm
Supply Voltage	3.3		5	V
Operating Temperature Range	0~70		-55~125	Deg C
Capacitive Load on Output		15	50	pF
TTL Load on Output	1		10	TTL
Supply Current:				
5V 0.5-23.9MHz			20	mA
5V 24-49.9MHz			30	mA
5V 50-69.9MHz			40	mA
5V 70-125MHz			60	mA
3.3V 0.5-23.9MHz			15	mA
3.3V 24-49.9MHz			20	mA
3.3V 50-69.9MHz			30	mA
3.3V 70-125MHz			45	mA
Output Voltage :				
High (5Vdd)	4.5			V
High (3.3Vdd)	2.4			V
Low (5Vdd)			0.5	V
Low (3.3Vdd)			0.5	V
Symmetry	40:60	45:55	48:52	%
Jitter		1		pS
Rise/Fall time (frequency dependant)	1	8	10	nS
Start up Time			10	mS

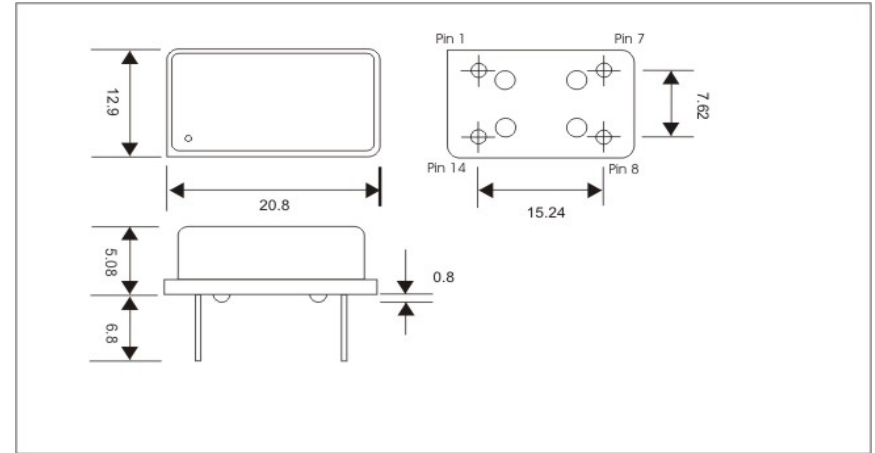

### Pin Assignments

Pin 1	N/C (9700) or Tri-State (9710)
Pin 7	Ground
Pin 8	Output
Pin 14	+V DC

### Tri-State Voltages

N.C	Output Active
>2.2V	Output Active
<0.8V	Output Disabled

(Pin 1 has internal pull up resistor to allow it to float High)

### Options and How to Specify

AEL97  
 Pin 1: 0=N.C., 1=E/D  
 Supply voltage: 0=5V, 3=3.3V  
 Stability\* (+/-ppm): C=100, B=50, A=25  
 Temperature range: S=0~+70, I=-40~+85C, M=-55+125C  
 e.g. AEL9703CI 20MHz = N.C, 3.3V, +/-100ppm, -40~+85C, 20MHz

AEL Crystals Ltd. Reserve the right to amend specifications without notification. Please ensure you have the latest issue  
 \*please contact our Sales Office for further options

<b>TITLE</b>	AEL 97-series oscillator
Part Number	<b>Contact Sales Office</b>
Stock Number	<b>Contact Sales Office</b>
Issue Date	16/03/2006
Issue Number	1



Module "D", Airtech II  
 Jenner Road, Manor Royal  
 Crawley RH10 9GA