


SPECIFICATION

- 1. Rated Voltage 5 VDC
- 2. Operating Voltage 4~8 VDC
- 3. Max. Rated Current 30mA/5VDC
- 4. Min. Sound Pressure Level 80dB/10cm
- 5. Resonant Frequency 2700±300HZ
- 6. Response Time 50ms
- 6. Case Material PPO
- 7. Operating Temperature -20~+70°C
- 8. Store Temperature -30~+80°C
- 9. Weight 1.0g

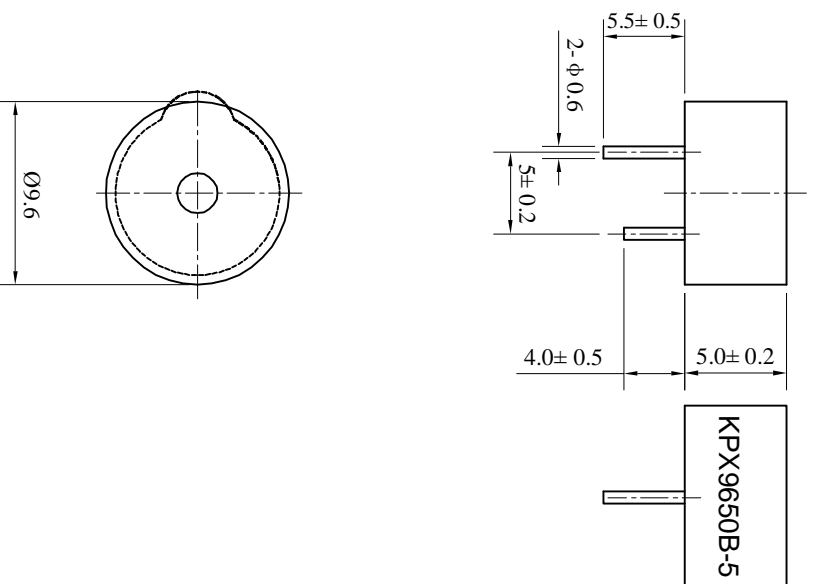

No.		DESCRIPTION		APPROVED	DATE	KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	Magnetic Buzzer KPX9650B-5	UNIT	DWGNO	KP3.843.731 SHEET	VER 1.3
APPROVALS		DATE	DATE	CHECKED	SCALE			mm	NOT TO SCALE		
TO THE ENGINEERS X XX XXX 90° FORWARD ±2° TAPER ANGLES - DIMENSIONS		DRAWN		APPROVED	06.07.05	SCALE	NOT TO SCALE	SHEET	VER	1.3	

1	2	3	4	5	6	7	8
A	B	C	D	E	F	F	A