

MAGNETIC TRANSDUCER

(Pin Type- Ø9.0mm)

B


Shape

KST-911AP
KST-931AP
KST-951AP



Model Number	KST-911AP	KST-931AP	KST-951AP
Rated Voltage (Vo-p)	1.5	3.0	5.0
Operating Voltage Range (Vo-p)	1.0 ~ 2.0	2.0 ~ 4.0	4.0 ~ 6.0
Current Consumption (mA)	Max. 80		
Coil Resistance (Ω)	6.0±1.0	15.0±2.3	30±4.5
Sound Pressure Level (dBA)	Min. 85dBA(Typical 92)@10cm		
Rated Frequency (Hz)	2730		
Operating Temperature (°C)	-20 ~ +60		
Storage Temperature (°C)	-30 ~ +70		
Weight (Gram)	1.0		
Material	PPO		


Dimension

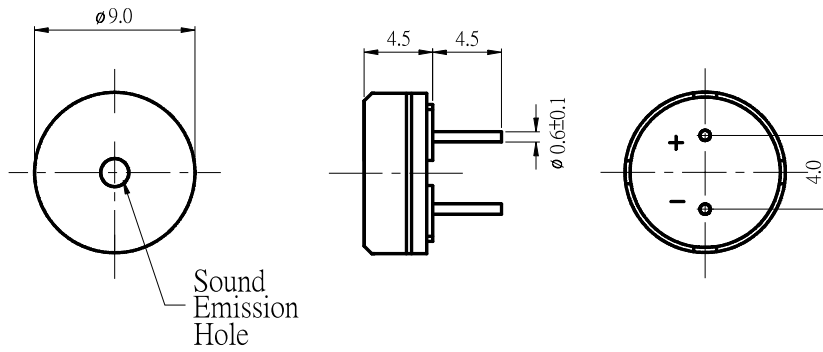


Tol : ±0.5 Unit : mm

Characteristic


KST-911AP

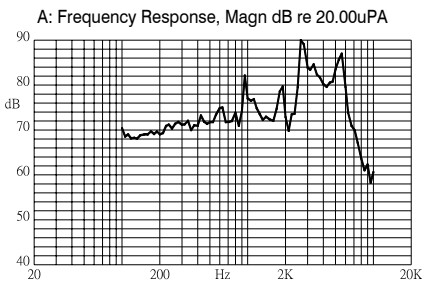

KST-931AP

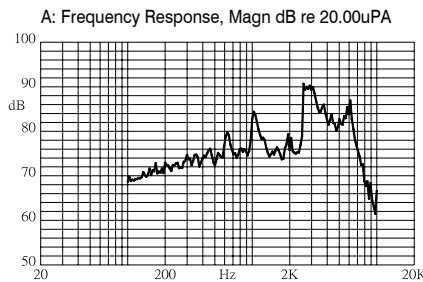

KST-951AP

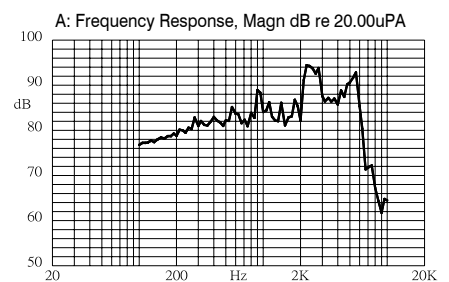

Shape


KST-911RP/A
KST-931RP/A
KST-951RP/A



B


Model Number	KST-911RP/A	KST-931RP/A	KST-951RP/A
Rated Voltage (Vo-p)	1.5	3.0	5.0
Operating Voltage Range (Vo-p)	1.0 ~ 2.0	2.0 ~ 4.0	4.0 ~ 6.0
Current Consumption (mA)	Max. 80		
Coil Resistance (Ω)	6.0 ± 1.0	15.0 ± 2.3	30.0 ± 4.5
Sound Pressure Level (dBA)	Min. 85dBA(Typical 91)@10cm		Min. 85dBA(Typical 92)@10cm
Rated Frequency (Hz)	2730		
Operating Temperature ($^{\circ}\text{C}$)	-20 ~ +60		
Storage Temperature ($^{\circ}\text{C}$)	-30 ~ +70		
Weight (Gram)	2.0		
Material	PPO		

Dimension

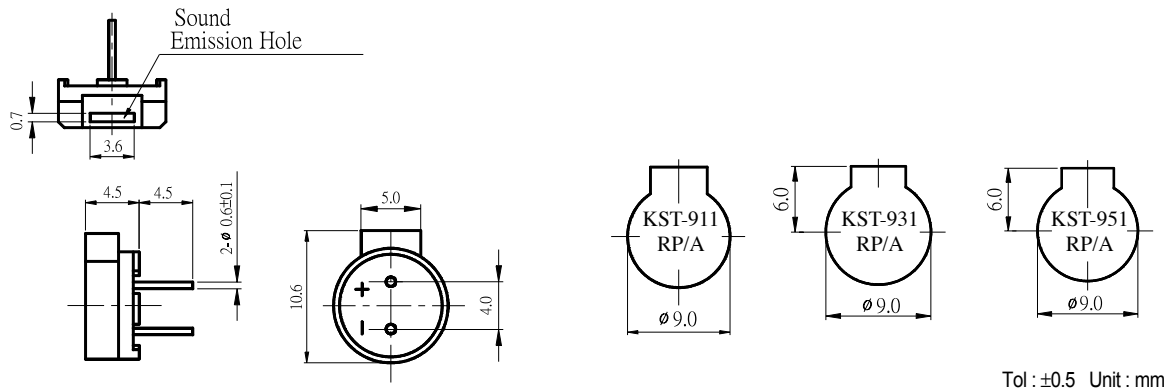


Characteristic


KST-911RP/A

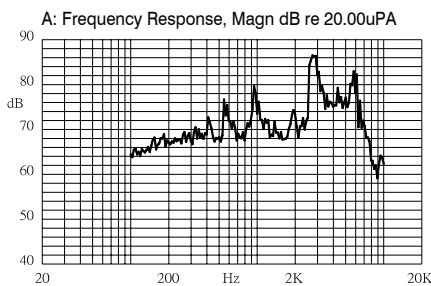

KST-931RP/A

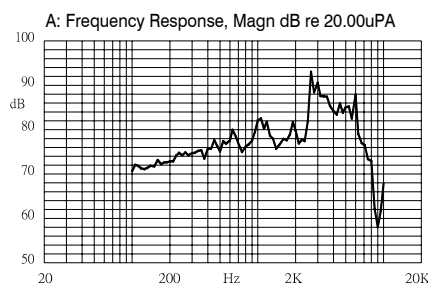

KST-951RP/A

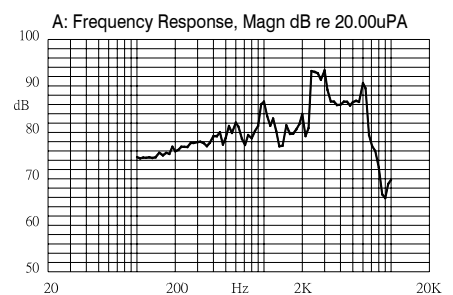

MAGNETIC TRANSDUCER (Pin Type-Ø12.0mm)

B


Shape

KSQ-703BP




Model Number	KSQ-703BP
Rated Voltage (Vo-p)	3.0
Operating Voltage Range (Vo-p)	2.0 ~ 4.0
Current Consumption (mA)	Max. 90
Coil Resistance (Ω)	15.0 \pm 2.0
Sound Pressure Level (dBA)	Min. 85dBA(Typical 90)@5cm
Rated Frequency (Hz)	2000
Operating Temperature ($^{\circ}$ C)	-20 ~ +60
Storage Temperature ($^{\circ}$ C)	-40 ~ +70
Weight (Gram)	1.5
Material	Noryl SE1-J

Dimension

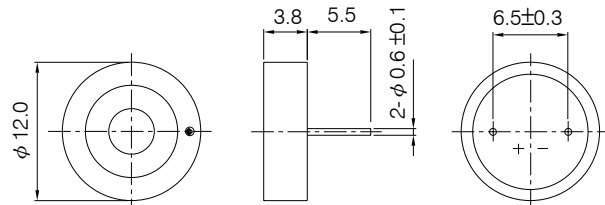

Tol : \pm 0.5 Unit : mm

Characteristic

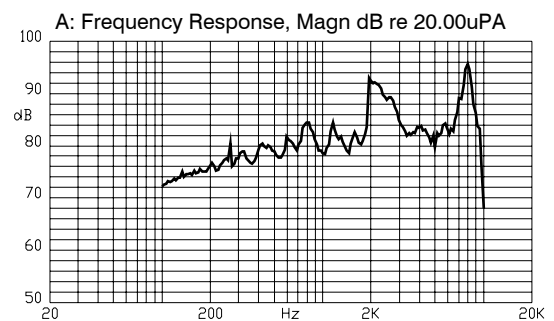

Shape

KSQ-706BP
KSQ-601BP



Shape

KSQ-RP/E




B

Model Number	KSQ-706BP	KSQ-601BP
Rated Voltage (Vo-p)	1.5	
Operating Voltage Range (Vo-p)	1.0 ~ 2.0	
Current Consumption (mA)	Max. 20	Max. 35
Coil Resistance (Ω)	50.0 ± 7.5	16.0 ± 2.4
Sound Pressure Level (dBA)	Min. 70dBA(Typical 75)@10cm	Min. 70dBA(Typical 76)@10cm
Rated Frequency (Hz)	2048	
Operating Temperature (°C)	-20 ~ +60	
Storage Temperature (°C)	-30 ~ +70	
Weight (Gram)	2.0	
Material	PPO	


Model Number	KSQ-RP/E
Rated Voltage (Vo-p)	1.5
Operating Voltage Range (Vo-p)	1.0 ~ 2.0
Current Consumption (mA)	Max. 80
Coil Resistance (Ω)	5.0 ± 1.0
Sound Pressure Level (dBA)	Min. 85dBA(Typical 91)@10cm
Rated Frequency (Hz)	2730
Operating Temperature (°C)	-20 ~ +60
Storage Temperature (°C)	-30 ~ +70
Weight (Gram)	2.0
Material	Noryl SE1-J

Dimension

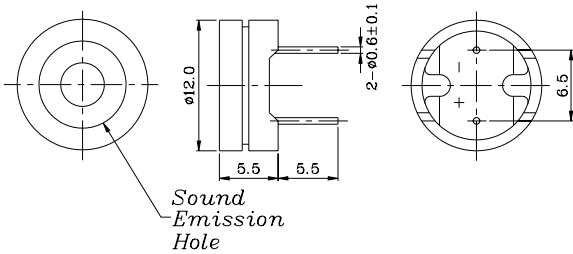

Tol : ±0.5 Unit : mm

Dimension

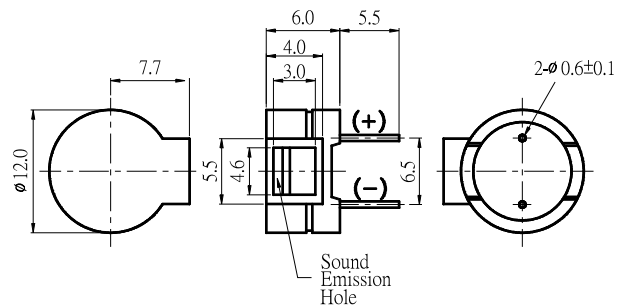


Tol : ±0.5 Unit : mm

Characteristic

KSQ-706BP

KSQ-601BP

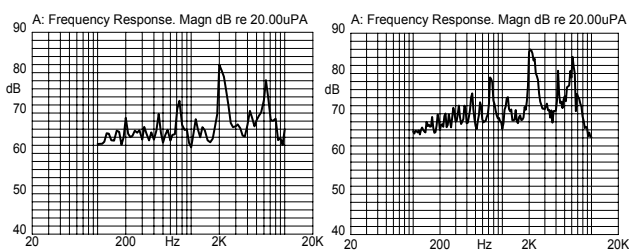

Characteristic

A: Frequency Response, Magn dB re 20.00uPA

