
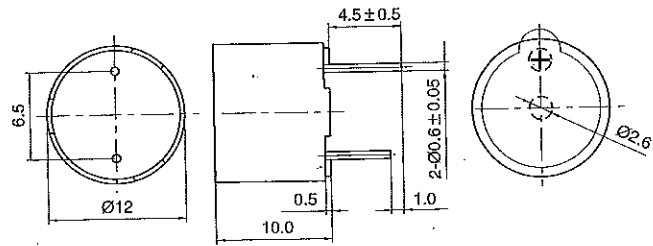
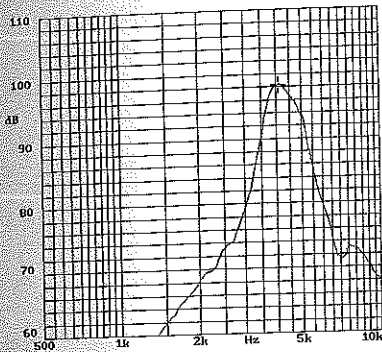


HCM1201B

Rated Voltage (V)	1.5
Operating Voltage (V)	1.1~1.7
Rated Current (mA)	Max. 30
Coil Resistance (Ω)	51 ± 7.5
Coil Impedance (Ω)	100
Sound Output at 10 cm (dB)	Min.85
Resonant Frequency (Hz)	4096
Operating Temperature ($^{\circ}\text{C}$)	-25~+70
Storage Temperature ($^{\circ}\text{C}$)	-30~+85
Weight (g)	2



Tolerance: ± 0.2

HCM12C SERIES

9

Type	HCM1201C	HCM1205C	HCM1212C
Rated Voltage (V)	1.5	5	12
Operating Voltage (V)	1~3	3~8	8~16
Rated Current (mA)	Max. 30	Max. 50	
Coil Resistance (Ω)	16 ± 3	40 ± 4	140 ± 14
Coil Impedance (Ω)	45	80	240
Sound Output at 10 cm (dB)	Min.85		
Resonant Frequency (Hz)	2600 ± 200	2400 ± 200	
Operating Temperature ($^{\circ}\text{C}$)	-30~+70		
Storage Temperature ($^{\circ}\text{C}$)	-30~+85		
Weight (g)	2		

