


SPECIFICATION

- 1. Rated Voltage 1.5V
- 2. Operating Voltage 1~3V
- 3. Max. Rated Current 30mA
- 4. Resonant Frequency 2400Hz
- 5. Min. Sound Pressure Level..... 82dB/10cm
- 6. Coil Resistance 15 Ω
- 7. Coil Impedance 40 Ω
- 8. Case Material PPS
- 9. Operating Temperature -20~+70℃
- 10. Store Temperature -30~+80℃

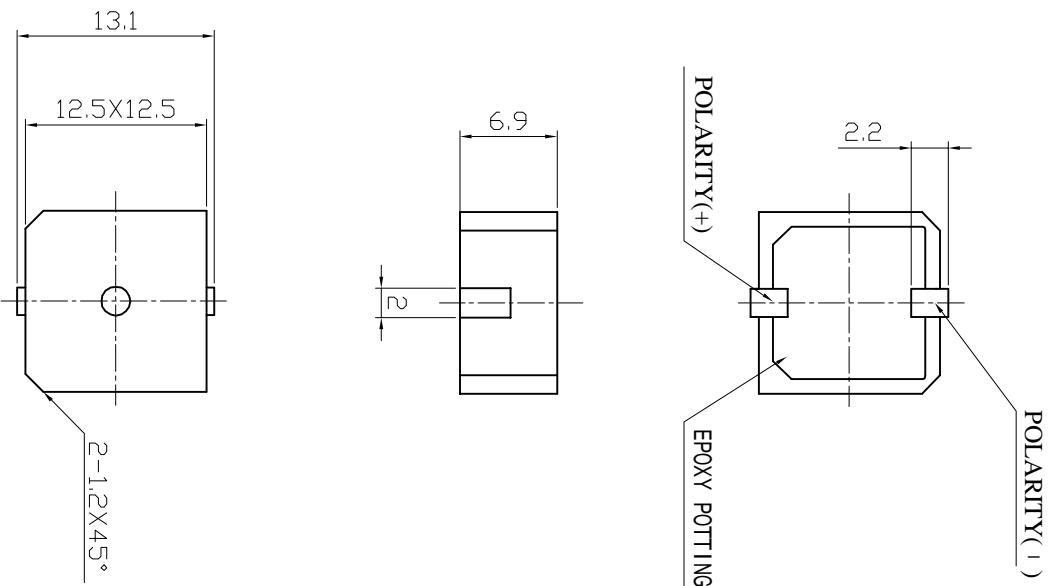

No.		DESCRIPTION		APPROVED		DATE	
TOTAL QUANTITY		DRAWN		APPROVALS		DATE	
XX		XX		XX		XX	
90° ROUNDED ±0.1		CHECKED		APPROVED		05.07.07	
FIRST ANGLE PROJECTION		UNIT		SCALE		NOT TO SCALE	
mm		DWG NO.		SHEET		VER. 1.1	
KEPO NINGBO KEPO ELECTRONIC CO.,LTD		Magnetic Buzzer		KP3.840.866			
http://www.chinacoustic.com		SMT-1265A					

A	1	2	3	4	5	6	7
B	1	2	3	4	5	6	7
C	1	2	3	4	5	6	7
D	1	2	3	4	5	6	7
E	1	2	3	4	5	6	7
F	1	2	3	4	5	6	7