

SPEC NO.: CU-212SMD

Specification

TO:

Model Name: Crystal Oscillator

PART NO: SOC3225-25.000M-30-3.3V-E

CUSTOMER PART NO.:

APPROVAL SHEET

Approved?	Yes
	No.
Customer's comments are welcomed here.	
Pls return this copy as a certificate of your approval by Fax(+86-755-84528986).	
Approved By	Date: _____

STRONG ELECTRONICS&TECHNOLOGY LIMITED

Tel:86-755-84528985 Fax: 86-755-84528986

Email:info@strongfirst.com.cn

www.strongfirst.com.cn

SPECIFICATION


1. RANGE:

This specification shall cover the characteristics of crystal oscillator with Strong's P/N: SOC3225-25.000M-30-3.3V-E

2. ELECTRICAL SPECIFICATION

ITEM	SPECIFICATION
Package	S3225
Output Signal Waveform	CMOS
Frequency Range	25.000MHz
Current Consumption	30mA Max
Frequency Stability	± 30 ppm Max
Load	15pF
Output Symmetry	45~55 (at 50%VDD)
Rise Time/Fall Time	10nS Max.
Temperature Range	Operating: -40~+85°C Storage: -55°C to 125°C
Supply Voltage	3.3V+-5%
Output Level	1V Max
Aging	± 3 ppm/year Max
Stand-by function	Tri-state compatible

3. DIMENSION

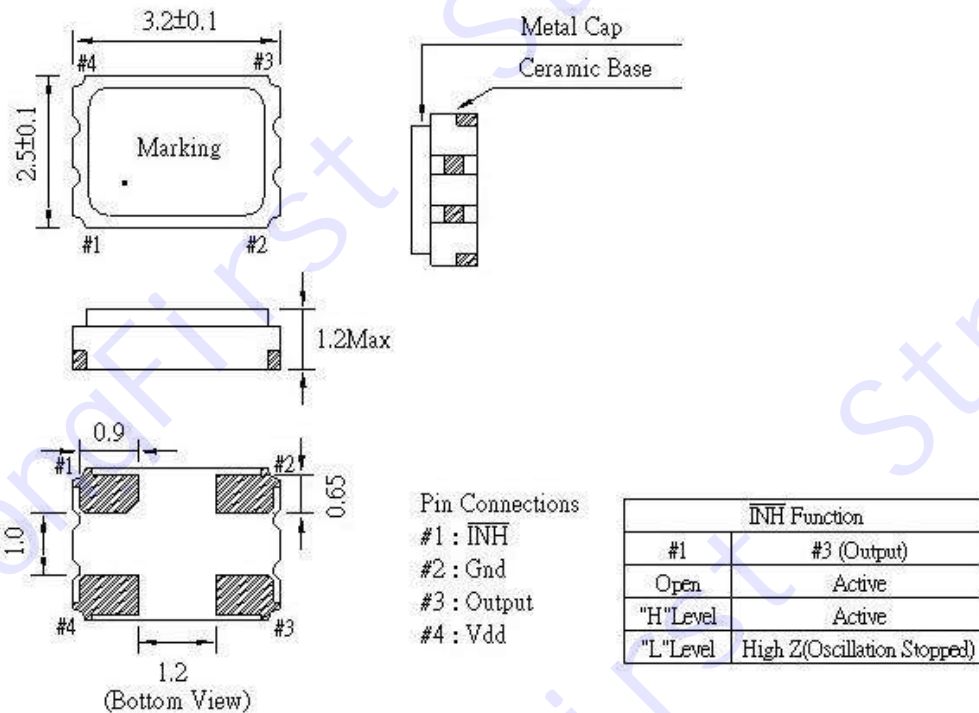

4. MECHANICAL SPECIFICATION

1) Terminal Strength

* Lead pulling test

Conditions: Load	907.2 gram
Direction	To the downward
Duration of applied force	5 seconds
Results:	There should be no distortion in appearance.

* Lead bending test

Conditions: Load	453.6 gram
Bending angle	90° to normal position
Rate of bending	3 seconds in each cycle
Number of bending	3
Results:	There should be no distortion in appearance.

2) Lead solder ability test

Conditions:	Dipping in solder($+230^\circ\text{C} \pm 5^\circ\text{C}$)for 5 seconds
Results:	More than 95% of surface being tested should be coated uniformly with solder.

3) Vibration test

Conditions: Frequency 10 – 55Hz
Amplitude 0.762mm
Sweep 1.0 minute
Duration 2 hours
Results: Frequency and wave form of tested products must
Remain within specifications.

4) Drop test

Conditions: Method of drop Natural drop
Dropping floor Hard wood board
Height 30cm
Number of drops 3 times
Results: Frequency and wave form of tested products must
remain within specifications.

5. ENVIRONMENTAL SPECIFICATION

1) Temperature test

* Temperature cycling test

Conditions: Steps of cycle 1) At -55°C,30 minutes
2) At +25°C,10 - 15 minutes
3) At +85°C,30 minutes
4) At +25°C,10 - 15 minutes
Number of cycles 3 times

Results: Frequency and wave form of tested products must
remain within specifications.

* Low Temperature test

Conditions: Temperature -20°C ± 2°C
Length of test 96 hours

Results: There should be no stain on surface of products.
Frequency and wave form of tested products must
remain within specifications.

2) Aging test

Conditions: Temperature +85°C ± 20°C
Length of test 96 hours

Results: Deviation of frequency must be less than $\pm 3\text{ppm}$

3) Salt spray test

Conditions: Temperature $+35^{\circ}\text{C} \pm 2^{\circ}\text{C}$
Length of test 48 hours
NaCl % 5%

Results: There should be no stain on surface of products.

4) Humidity test

Conditions: Temperature $+40^{\circ}\text{C} \pm 2^{\circ}\text{C}$
Relative humidity 90 - 95%
Length of test 96 hours

Results: a. Insulation resistance must be $500\text{ M}\Omega/100\text{ Vac}$. minimum
b. Resistance and wave form must remain within specifications.

© 2009 Strongfirst. All Rights Reserved.