

SPECIFICATION


1. SCOPE

This specification is applied to the piezo-element.


2. SPECIFICATION

(at 25°C)

| | | |
|---------------------------|---|--------------------------|
| 2.1 Resonant Frequency | : | 2.2 ± 0.2 KHz |
| 2.2 Resonant Resistance | : | 500 Ω max |
| 2.3 Capacitance | : | 50000 pF ± 30% at 100 Hz |
| 2.4 Input Voltage | : | 30 Vp-p max |
| 2.5 Operating Temperature | : | -20 ~ +50 °C |
| 2.6 Storage Temperature | : | -20 ~ +60 °C |
| 3. DIMENSION | : | as per figure |

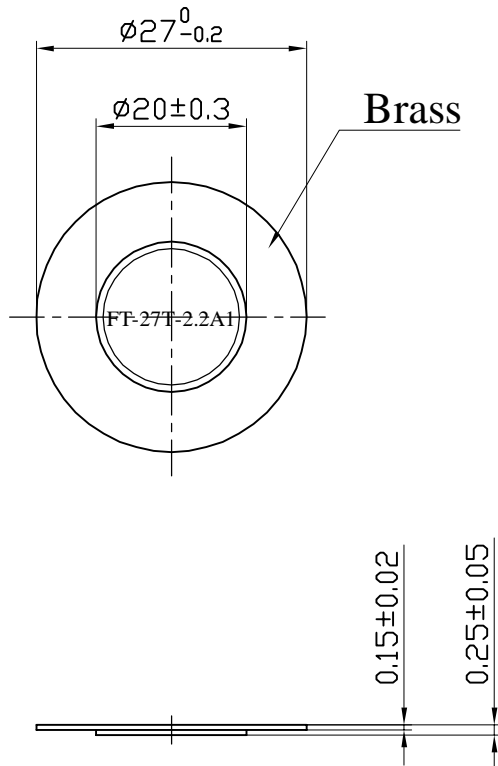

| | | | | | | | |
|--|--------------|----------|---------------------|---|-----|-------|--|
| TOLERANCES UNLESS NOTED OTHERWISE .X ± .XX ± .XXX ± 90° FORMED +2° ANGLES -1° | DRAWN | | KEPO MODEL NO. | CUSTOMER | | | |
| | DESIGN | | FT-27T-2.2A1 | CUSTOMER NO. | | | |
| | CHECKED | | | | | | |
| | APPROVED | | DWG NO. | VER | 1.0 | SCALE | |
| | DATE | 06.11.11 | KP3.846.760 | UNIT | mm | SHEET | |
| | CONTRACT NO. | | | KEPO CO., LTD. TEL: (+86)574-88370330 FAX: (+86)574-88370329 | | | |
| AGENCY APPROVAL | | | | | | | |



1

2

3

4